


## DUAL 4-20mA CONTROL LOOP PROTECTOR

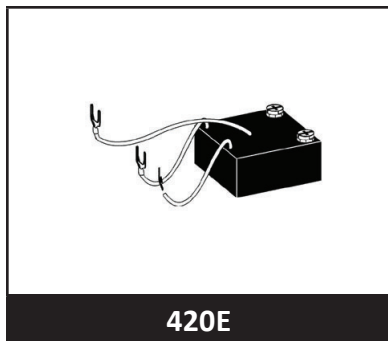

### DESCRIPTION

The 420E series is a two stage transient voltage protector providing primary and secondary protection against lightning, inductive switching and electrostatic discharge (ESD) transient threats. The first stage diverts the transient current through the ground terminal return path and the second stage clamps the voltage to a safe level without interruption of service.

The 420E series is designed to protect 4-20mA analog control loops from differential (line to line) and common mode (line to ground) transients. Terminals 1 and 2 are designated as line pairs for both the line and the equipment side of the protector. A transient voltage suppressor is internally connected across each line pair for differential mode protection. Each line pair is referenced to ground. This product can also be used on telephone, signal/data lines, security, timing and control interface circuits.

### FEATURES

- Compatible with IEC 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- Compatible with IEC 61000-4-4 (EFT): 40A - 5/50ns
- Compatible with IEC 61000-4-5 (Surge): 95A, 8/20 $\mu$ s, Level 4 (Line-Gnd) & 48A, Level 4 (Line-Line)
- Designed for 4-20mA Current Loops
- Automatic Reset - Does Not Interrupt Service
- Permanent Two-Stage Line Pair Protection
- Common Mode & Differential Mode Protection
- Subnanosecond Response Time
- Effective Against Lightning, Inductive Switching and ESD

### APPLICATIONS

- Security Alarm Systems
- Industrial Control and Monitoring Systems
- Remote Tech Site Station
- Process Control Loops

### MECHANICAL CHARACTERISTICS

- Approximate Weight: 50 grams
- Flammability Rating UL 94V-0

## TYPICAL DEVICE CHARACTERISTICS

### MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Operating Line Current	$I_O$	100	mA
Transient Source Voltage	-	6	kV
Transient Current (8/20 $\mu$ s) - per Line	-	10	kA
Operating Temperature	$T_A$	-55 to 100	°C
Storage Temperature	$T_{STG}$	-55 to 100	°C

### ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER	MAXIMUM OPERATING LINE VOLTAGE  $V_{OP}$ $\pm$ VOLTS	MAXIMUM LEAKAGE CURRENT  @ $V_{OP}$ $I_D$ $\mu$ A	MAXIMUM CLAMPING VOLTAGE (8/20 $\mu$ s)  @ 2000A $V_C$ VOLTS	MAXIMUM CAPACITANCE  @ 0V, 1MHz C pF	MAXIMUM LINE THROUGHPUT RESISTANCE  R OHMS
420E212	12.0	5.0	22	6000	12
420E225	25.0	5.0	44	3000	12
420E228	28.0	5.0	46	2800	12
420E236	36.0	5.0	60	1500	12
420E250	50.0	5.0	80	1200	12
420E260	60.0	5.0	95	1000	12

## INSTALLATION INSTRUCTIONS



There are two (2) terminals on the **LINE SIDE** and three (3) wires on the **EQUIPMENT SIDE** of this surge protection device (SPD). The Ground lead is considered ground for both the input terminal and the equipment wire connections. For the best results, the ground wire should be connected to a low impedance ground or the green wire AC power ground. It is recommended that a #14 standard wire be used for this connection.

Field (current) loops or incoming signal/data lines are to be cut or disconnected from the equipment to insert the SPD. The **LINE SIDE** terminals of the protector are to be connected to the field loop wires. The **EQUIPMENT SIDE** of the protector is connected to the equipment/controller, etc. The location of the protector should be as close to the equipment requiring protection.

## PACKAGE INFORMATION

### OUTLINE DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	-	35.56	-	1.40
B	63.50		2.50	
C	-	30.48	-	1.20
D	-	17.15	-	0.675

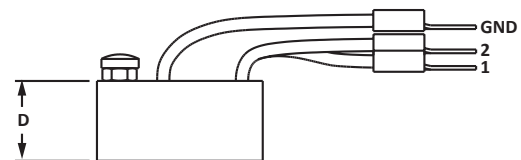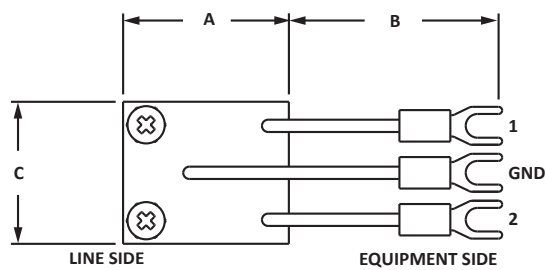

### ORDERING INFORMATION

BASE PART NUMBER (xx = Voltage)	MARKING
420Exxx	Logo, Date Code, Terminal Designations and Part Number

## COMPANY INFORMATION

---

### COMPANY PROFILE

In business more than 25 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers LED wafer die for ESD protection and related high frequency products. ProTek Devices is ISO 9001:2015 certified.

### CONTACT US

#### Corporate Headquarters

2929 South Fair Lane  
Tempe, Arizona 85282  
USA

#### By Telephone

General: 602-431-8101  
Sales: & Marketing: 602-414-5109  
Customer Service: 602-414-5114  
Product Technical Support: 602-414-5107

#### By Fax

General: 602-431-2288

#### By E-mail:

Asia Sales: [asiasales@protekdevices.com](mailto:asiasales@protekdevices.com)  
Europe Sales: [europesales@protekdevices.com](mailto:europesales@protekdevices.com)  
U.S. Sales: [ussales@protekdevices.com](mailto:ussales@protekdevices.com)  
Distributor Sales: [distysales@protekdevices.com](mailto:distysales@protekdevices.com)  
Customer Service: [service@protekdevices.com](mailto:service@protekdevices.com)  
Technical Support: [support@protekdevices.com](mailto:support@protekdevices.com)

#### ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19  
Zervex  
Singapore - 408538  
Tel: +65-67488312  
Fax: +65-67488313

#### Web

[www.protekdevices.com](http://www.protekdevices.com)

COPYRIGHT © ProTek Devices 1998 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.