ULTRA LOW CAPACITANCE ASYMMETRICAL TVS ARRAY



DESCRIPTION

The PLR1524 is an ultra low capacitance assymetrical TVS array. It is designed to protect against ESD and high speed voltage transient events, the RF section Cable TV Set Top Boxes and RF Low Noise Block (Satellite TV) and Microwave radios. The assymetrical configuration on voltages of 15V and 24V and offering a max capacitance of 0.6pF will guarantee the signal integrity and eliminate the use of additional components. This device meets the IEC 61000-4-2 (ESD), IEC 61000-4-4 (EFT) and IEC 61000-4-5 (Surge) requirements.

FEATURES

- Compatible with IEC 61000-4-2 (ESD): Contact ±8kV, Air ±15kV
- Compatible with IEC 61000-4-4 (EFT): 40A, 5/50ns
- Compatible with IEC 61000-4-5 (Surge): 2A 8/20μs
- ESD Protection > 25 kilovolts
- 60 Watts Peak Pulse Power per Line (tp = 8/20μs)
- Low Leakage Current < 0.1μA
- Asymmetrical Voltage feature 15V & 24V (Bidirectional)
- Ultra Low Capacitance: 1.0pF Max @ 5MHz, 1Vdc
- RoHS Compliant
- REACH Compliant


MECHANICAL CHARACTERISTICS


- Molded DFN-10 Package
- Approximate Weight: 7 milligrams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:
 - Pure-Tin Sn, 100: 260-270°C
- 8mm Tape and Reel Per EIA Standard 481
- Flammability Rating UL 94V-0

APPLICATIONS

- CATV Set Top Box
- DOCSIS 3.1 Cable Modems
- VSAT LNB Down Converters
- Microwave Radios

PIN CONFIGURATION

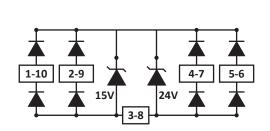




TYPICAL DEVICE CHARACTERISTICS


MAXIMUM RATINGS @ 25°C Unless Otherwise Specified							
PARAMETER	VALUE	UNITS					
Operating Temperature	T _L	-55 to 150	°C				
Storage Temperature	T _L	-55 to 150	°C				
Peak Pulse Power (tp = 8/20μs) - See Figure 1	P _{pp}	60	W				


ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified								
PART NUMBER	DEVICE MARKING	RATED STAND-OFF VOLTAGE (Note 1)	MINIMUM BREAKDOWN VOLTAGE (Note 1)	MAXIMUM LEAKAGE CURRENT (Note 1)	MAXIMUM CAPACITANCE (Note 1) @0V, 1MHz	MAXIMUM CAPACITANCE (Note 1)		
		V _{wm} VOLTS	V _(BR) VOLTS	V _c VOLTS	Ι _D μΑ	C pF	C pF	
DI D1534	1524	15.0	16.7	35.0	0.1	1.2	1.0	
PLR1524	1524	24.0	26.7	50.0	0.1	1.2	1.0	
NOTES 1. I/O to ground.								

SIMPLIFIED TYPICAL APPLICATION FOR A DUAL LNB DEDICATED SUPPLIES (V & H)

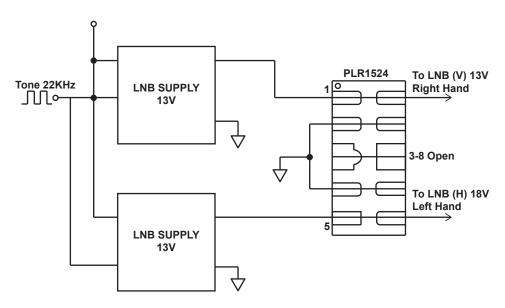


TYPICAL DEVICE CHARACTERISTICS

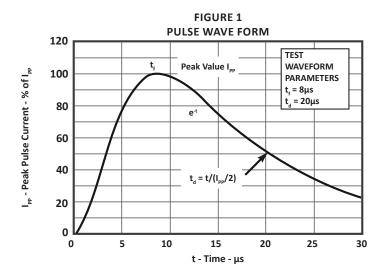

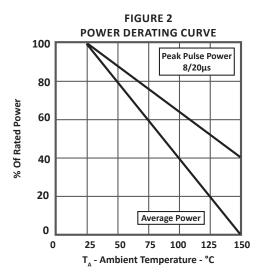


PACKAGE INFORMATION

OUTLINE DIMENSIONS							
DIM	MILLIN	IETERS	INCHES				
DIIVI	MIN	MAX	MIN	MAX			
Α	0.47	0.60	0.019	0.024			
A1	0.00	0.05	0.000	0.002			
A2	0.13	0.21	0.005	0.008			
b	0.15	0.25	0.006	0.010			
b1	0.35	0.45	0.014	0.018			
D	2.40	2.40 2.60		0.102			
E	0.90 1.10		0.035	0.043			
е	0.50 N	ominal	0.020 N	Iominal			
L	L 0.35 0.43 0.014 0.017						
NOTES 1. Controlling dimension: millimeters.							

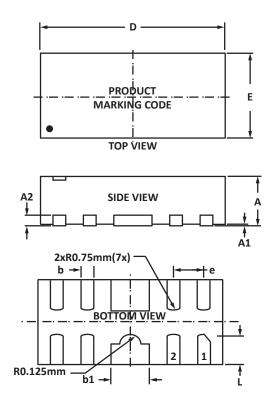


PAD LAYOUT						
DIM	MILLIMETERS	INCHES				
DIIVI	NOMINAL	NOMINAL				
С	0.875	0.34				
G	0.20	0.008				
Р	0.50	0.020				
P1	1.00	0.039				
Х	0.25	0.010				
X1	0.46	0.018				
Y	0.675	0.027				
Y1	1.55	0.061				
NOTES						

1. Controlling dimension: millimeters.

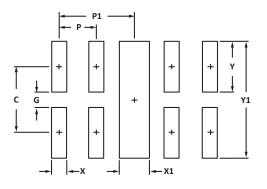

TAPE AND REEL

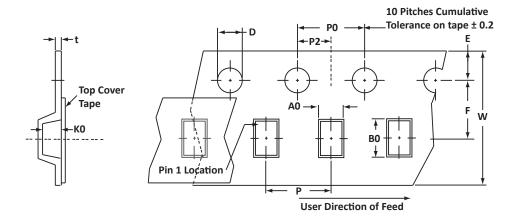

SPECIFICATIONS												
REEL DIA.	TAPE WIDTH	A0	В0	ко	D	E	F	w	P0	P2	Р	tmax
178mm (7")	8mm	1.20 ± 0.10	2.70 ± 0.10	0.75 ± 0.10	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.25

NOTES

- 1. Dimensions are in millimeters.
- 2. Surface mount product is taped and reeled in accordance with EIA-481.
- 3. Suffix T73 = 7" Reel 3,000 pieces per 8mm tape.
- 4. Marking on Part marking code (see page 2).

ORDERING INFORMATION							
BASE PART NUMBER	SE PART NUMBER LEADFREE SUFFIX TAPE SUFFIX QTY/REEL REEL SIZE TUBE QT						
PLR1524	n/a	-T73	3,000	7"	n/a		
This device is only available in a Lead-Free configuration.							

05622.R0 2/22 Page 5 ISO 9001 CERTIFIED COMPANY



COMPANY INFORMATION

COMPANY PROFILE

In business more than 25 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers LED wafer die for ESD protection and related high frequency products. ProTek Devices is an ISO 9001 certified company.

CONTACT US

Corporate Headquarters

2929 South Fair Lane Tempe, Arizona 85282 USA

By Telephone

General: 602-431-8101

Sales: & Marketing: 602-414-5109 Customer Service: 602-414-5114 Product Technical Support: 602-414-5107

By Fax

General: 602-431-2288

By E-mail:

Asia Sales: asiasales@protekdevices.com
Europe Sales: europesales@protekdevices.com
U.S. Sales: ussales@protekdevices.com
Distributor Sales: distysales@protekdevices.com
Customer Service: service@protekdevices.com

Customer Sales: gistysales@protekdevices.com
Technical Support: support@protekdevices.com

ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19

Zervex

Singapore - 408538 Tel: +65-67488312 Fax: +65-67488313

Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2020 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.